

SHORTER but **Bigger** **3 Meter**
1 Meter



D925TX.D930TX

High Brightness Projector
SHORT-THROW

76" Diagonal @ 1 m . 100" Diagonal @ 1.3 m

High Brightness Short-Throw projector providing versatility for wide range of applications for instance in class rooms together with interactive wide boards or in small meeting rooms



D925TX.D930TX



High Stability

new lamp increased stability



Every user realizes that the lamp is a significant part of any projector. Lamp life and projection quality will be negatively influenced by using a flawed lamp. Vivitek Technology cooperated with Osram, world's top lamp manufacture, to develop a new generation of high efficiency lamp that last up to 4,000 hours in Eco mode with incredible stability.



High Brightness *Are you tired of dim image?* excellent improved image with high brightness



Market demand for high brightness increases gradually, the benefit from high brightness can achieve better result if the presenter wants eye contact with the audience while keeps ambient light on.



Filter Free

Say NO to the anti-dust filter
no anti-dust filter is required



Unlike other technology based projector with anti-dust filter which optics device is exposed in the air that causes temperature increment. However, DLP based projector has the congenital superiority in against dust aspect. Vivitek D9TX series has sealed optics engine, which keeps filter free, and more durable.

Easy Lamp Replacement

sliding top cover: Convenient top sliding allows for quick and easy lamp replacement.



Stunning picture quality

VividWheel III-enhanced Color Reproduction



▶ Improve color reproduction. Enabled Video AGC (Automatic Gain Control for Video Source

▶ With enabled automatic gain control, you will enjoy an essentially constant output signal from an electronic circuit despite variations in the strength of the input signal




Saving Time, Off & Go!

Full Connectivity HDMI, RJ45, RS232, AUDIO



Vivitek Technology has developed new education & conference's Projector, in addition to mainstream connectivity, with RJ45 network control and HDMI V1.3 to satisfy customer demand of new Full HD content

Wide Angle *Space limited solution*

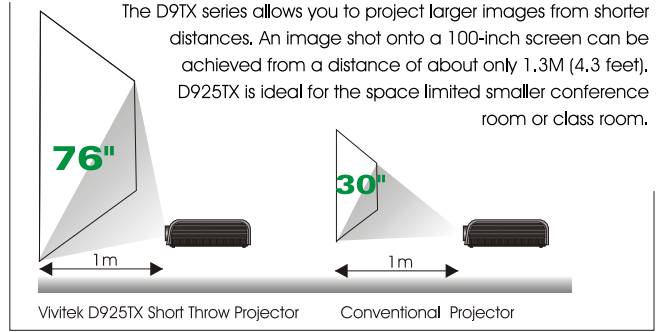

Projection Size & Distance

Screen size (inch)	40	76	80	100	120	150	200	250	300
Projection Distance(M)	0.53	1	1.06	1.32	1.58	1.98	2.64	3.3	3.96
Height (M)	0.61	1.1	1.22	1.52	2.1	2.63	3.51	4.38	4.57

The above numbers are approximate, and may be slightly different from the actual measurements

MODEL	D925TX	D930TX
Display technology	0,55" 1-Chip DMD	
Resolution	Native XGA 1024 x 768	
Brightness	2500 Lumens	3000 Lumens
Contrast ratio	2400:1	
Projection distance	0,5m-5 m	
Lens throw ratio	1,3m @ 100"	
Projection screen size	35"-350"	
Remote control	Fully Featured IR Remote with Laser Pointer and Mouse	
Lamp	230W	280W
Aspect ratio	Native (4:3) & Compatibility (16:9)	
Pc compatibility	VGA, SVGA, XGA, WXGA, SXGA, Macintosh	
Video compatibility	EDTV (480p), HDTV (576i/p, 720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/M/N 60, SECAM	
PC input terminals	RGB (D-Sub)x2, Composite Video (RCAx1), S-Video (Mini DIN)x1, Audio RCAx1, Audio Mini-Jackx1, HDMI(V1.3)x1	
Output terminals	RGB (D-Sub) x 1, Audio Mini-Jack x 1	
Communication terminals	USB (Service), RS-232C x 1, RJ45 x 1	
Keystone correction	Vertical (+/- 15 degree)	
Fan noise level	27dB/30 dB (Eco / Std. Mode)	29dB/34 dB(Eco / Std. Mode)
Audio speaker	3W Mono	
Projection method	Front, Rear, Table Top and Ceiling Mount	
Dimensions (wtxhxd)	13.2" x 4" x 10" (335x102x256mm)	
Weight	3,6kg (7.7lbs)	
Power consumption	290W, <1W Standby Power	350W, <1W Standby Power
Power supply	AC 100-240V	
Accessory	AC Power Cord, VGA-VGA Cable, Batteries for Remote, User Manual(CD),Remote Control,Lens Cap,Carrying Case	
Osd language	English/French/German/Italian/Spanish/Korean/Hungarian Simplified Chinese/Traditional Chinese/ Russian/Greek /Czechoslovak/Portuguese/Polish/Finnish/Swedish/Dutch /Danish/Turkish/Arabic/	

Specification subjects to change without notice.

Environmental Protection **RoHS** A mission from Vivitek **COMPLIANT**

Vivitek Technology always pays attention to the environmental protection & energy saving. The D9 contains following parts that is RoHS compliant:

- Lead-free solder : used for soldering all parts including circuit component electronics
- Lead-free glass: used for the lens
- Recycled paper: used in the user manuals and packing cartons
- Hi-efficiency power switching: reduces power consumption
- Less than 1w power consumption in standby mode, conforms to the
- American Environmental Protection Bureau to lead the advocate in view of Electronic Products Energy Saving Plan



[Http://www.vivitekc corp.com](http://www.vivitekc corp.com)

©2009 Vivitek Corporation. Values, Weights and dimensions shown are approximate. Errors and omissions accepted. Specification are subject to change without prior notice. This product maybe subject to export regulations. Vivitek is trademark of Vivitek Corporations. Projection images simulated.