


vivitek[®]
Vivid Colors, Vivid Life.

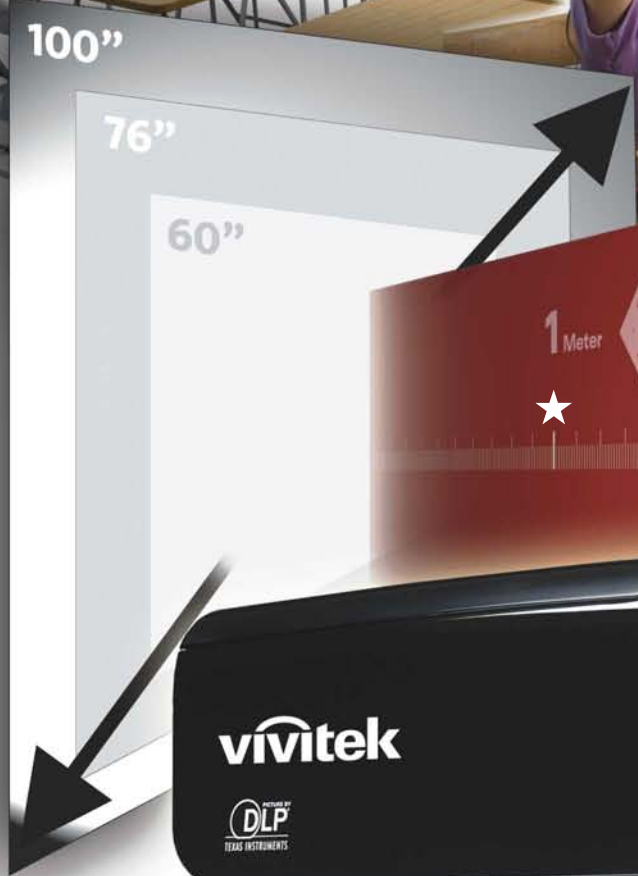

HDMI **HDTV**
HIGH-DEFINITION TELEVISION

A High Brightness Projectors
SHORT THROW

for Space Limited Meeting Room and Executive Office

76" @ 1 METER . 100" @ 1.3 METER

D930TX

- PICTURE BY **DLP** TEXAS INSTRUMENTS
- BrilliantColor** DLP
- Vivid Wheel** 100%
- Off n Go**
- 7 Color Management**
- Long Life** 4000
- Filter FREE**
- Shortthrow**

Best Energy Saving
< 1w standby power consumption

D930TX

High Stability

new lamp increased stability



Every user realizes that light bulb is one of the significant part of projector. Lamp life and projection quality will be influenced seriously by using flaw lamp. Vivitek Technology cooperate with Osram, world's top lamp manufacturer, develops new generation high efficient lamp last for up to 4,000 hours in Eco mode yet remains high stability.



High Brightness Are you tired of dim image? excellent improved image with high brightness



Market demand for high brightness increases gradually, the benefit from high brightness can achieve better result if the presenter wants eye contact with the audience while keeps ambient light on.



Filter Free Say NO to the anti-dust filter no anti-dust filter is required



Unlike other technology based projector with anti-dust filter which optics device is exposed in the air that causes temperature increment. However, DLP based projector has the congenital superiority in against dust aspect. Vivitek D9 series has sealed pure metal optics engine, which keeps filter free, and more durable in comparison with plastic components

Easy Lamp Replacement

sliding top cover: Convenient top loading allows for quick and easy lamp replacement.



Stunning picture quality



VividWheel III•enhanced Color Reproduction

- Improve color reproduction. Enabled Video AGC (Automatic Gain Control for Video Source
- With enabled automatic gain control, you will enjoy an essentially constant output signal from an electronic circuit despite variations in the strength of the input signal



Saving Time, Off & Go!


Full Connectivity additional HDMI, RJ45



Vivitek Technology has developed new education & conference's Projector, in addition to mainstream connectivity, with RJ45 network control and HDMI V1.3 to satisfy customer demand of new Full HD content

Wide Angle *Space limited solution*

The D930TX allows you to project larger images from shorter distances. An image shot onto a 100-inch screen can be achieved from a distance of about only 1.3M (4.3 feet). D930TX is an ideal for the space limited smaller conference room or class room.

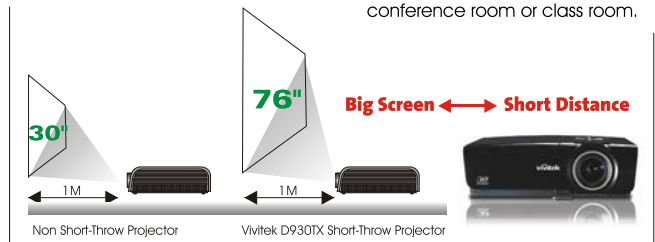

Projection Size & Distance

| Screen size (inch) | 40 | 76 | 80 | 100 | 120 | 150 | 200 | 250 | 300 |
|------------------------|------|------|------|------|------|------|------|------|------|
| Projection Distance(M) | 0.53 | 1 | 1.06 | 1.32 | 1.58 | 1.98 | 2.64 | 3.3 | 3.96 |
| Height (M) | 0.7 | 1.33 | 1.4 | 1.75 | 2.1 | 2.63 | 3.51 | 4.38 | 5.26 |

The above numbers are approximate, and may be slightly different from the actual measurements

MODEL : D930TX

| | |
|-------------------------|--|
| Display technology | 0.55" 1-Chip DMD |
| Resolution | Native XGA 1024 x 768 |
| Brightness | 3,000 Lumens |
| Contrast ratio | 2400:1 |
| Projection distance | 0.5m-5 m |
| Lens throw ratio | 1.3m @ 100" |
| Projection screen size | 35"-350" |
| Remote control | Fully Featured IR Remote with Laser Pointer and Mouse |
| Lamp | 280W |
| Aspect ratio | Native (4:3) & Compatibility (16:9) |
| Pc compatibility | VGA, SVGA, XGA, WXGA, SXGA, Macintosh |
| Video compatibility | EDTV (480p), HDTV (576i/p, 720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM |
| PC input terminals | RGB (D-Sub)x2, Composite Video (RCAx1), S-Video (Mini DIN)x1, Audio RCAx1, Audio Mini-Jackx1, HDMI(V1.3)x1 |
| Output terminals | RGB (D-Sub) x 1, Audio Mini-Jack x 1 |
| Communication terminals | USB (Service), RS-232C x 1, RJ45 x 1 |
| Keystone correction | Vertical (+/- 15 degree) |
| Fan noise level | 34dB (Eco-Mode), 37 dB (Standard Mode) |
| Audio speaker | 3W Mono |
| Projection method | Front, Rear, Table Top and Ceiling Mount |
| Dimensions (wtxhxd) | 13.2" x 4" x 10" (335x102x256mm) |
| Weight | 3.5kg (7.7lbs) |
| Power supply | AC 100-240V |
| Power consumption | 350W, <1W Standby Power |
| Accessory | AC Power Cord, VGA-VGA Cable, Batteries for Remote, User Manual(CD), Remote Control, Lens Cap, Carrying Case |
| Osd language | English/French/German/Italian/Spanish/Korean/Hungarian Simplified Chinese/Traditional Chinese/ Russian/Greek /Czechoslovak/Portuguese/Polish/Finnish/Swedish/Dutch /Danish/Turkish/Arabic/ |

Specification subjects to change without notice.

Best Energy Saving < 1w standby power consumption

Environmental Protection **ROHS** COMPLIANT

Vivitek Technology always pays attention to the environmental protection & energy saving. The D9 contains following parts that is RoHS compliant:

- Lead-free solder : used for soldering all parts including circuit component electronics
- Lead-free glass: used for the lens
- Recycled paper: used in the user manuals and packing cartons
- Hi-efficiency power switching: reduces power consumption
- Less than 1w power consumption in standby mode, conforms to the
- American Environmental Protection Bureau to lead the advocate in view of Electronic Products Energy Saving Plan

vivitek
Vivid Colors, Vivid Life.

Vivitek Corporation

[Http://www.vivitekc corp.com](http://www.vivitekc corp.com)

©2009 Vivitek Corporation. Values, Weights and dimensions shown are approximate. Errors and omissions accepted. Specification are subject to change without prior notice. This product maybe subject to export regulations. **vivitek** Is trademark of Vivitek Corporations. Projection images simulated.